BS170

Small Signal MOSFET 500 mA, 60 Volts


N−Channel TO−92 (TO−226)

ON Semiconductor®

www.onsemi.com

500 mA, 60 Volts
$R_{DS(on)}$ = 5.0 Ω

N−Channel



Features

- This is a Pb−Free Device*


MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain−Source Voltage	V_{DS}	60	Vdc
Gate−Source Voltage − Continuous − Non−repetitive ($t_p \le 50$ μs)	 V_{GS} V_{GSM}	 ±20 ±40	 Vdc Vpk
Drain Current (Note)	I_D	0.5	Adc
Total Device Dissipation @ T_A = 25°C	P_D	350	mW
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


NOTE: The Power Dissipation of the package may result in a lower continuous drain current.

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



TO−92 (TO−226)
CASE 29
STYLE 30

MARKING DIAGRAM & PIN ASSIGNMENT



A = Assembly Location
Y = Year
WW = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

© Semiconductor Components Industries, LLC, 2011

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Gate Reverse Current (V_{GS} = 15 Vdc, V_{DS} = 0)	I_{GSS}	–	0.01	10	nAdc
Drain−Source Breakdown Voltage (V_{GS} = 0, I_D = 100 μAdc)	$V_{(BR)DSS}$	60	90	–	Vdc
ON CHARACTERISTICS (Note 1)					
Gate Threshold Voltage (V_{DS} = V_{GS}, I_D = 1.0 mAdc)	$V_{GS(Th)}$	0.8	2.0	3.0	Vdc
Static Drain−Source On Resistance (V_{GS} = 10 Vdc, I_D = 200 mAdc)	$r_{DS(on)}$	–	1.8	5.0	Ω
Drain Cutoff Current (V_{DS} = 25 Vdc, V_{GS} = 0 Vdc)	$I_{D(off)}$	–	–	0.5	μA
Forward Transconductance (V_{DS} = 10 Vdc, I_D = 250 mAdc)	g_{fs}	–	200	–	mmhos
SMALL−SIGNAL CHARACTERISTICS					
Input Capacitance (V_{DS} = 10 Vdc, V_{GS} = 0, f = 1.0 MHz)	C_{iss}	–	–	60	pF
SWITCHING CHARACTERISTICS					
Turn−On Time (I_D = 0.2 Adc) See Figure 1	t_{on}	–	4.0	10	ns
Turn−Off Time (I_D = 0.2 Adc) See Figure 1	t_{off}	–	4.0	10	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

ORDERING INFORMATION

Device	Package	Shipping†
BS170	TO−92 (TO−226) (Pb−Free)	1000 Unit/Tube
BS170RLRAG	TO−92 (TO−226) (Pb−Free)	2000 Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

RESISTIVE SWITCHING

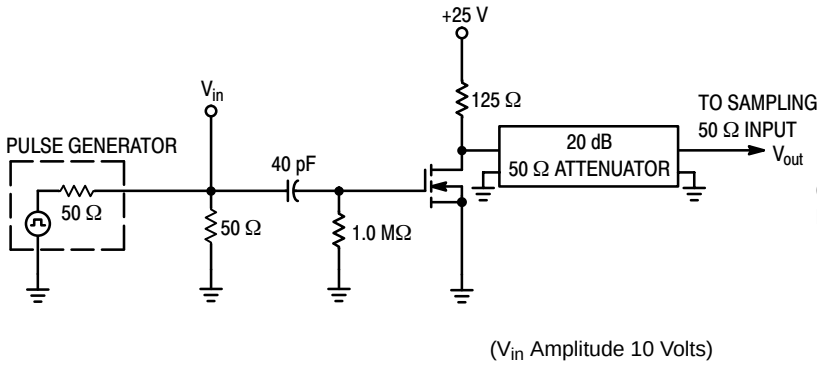


Figure 1. Switching Test Circuit

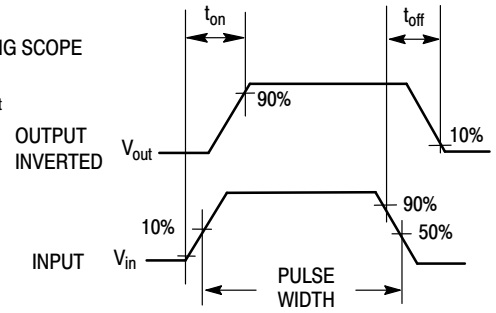


Figure 2. Switching Waveforms

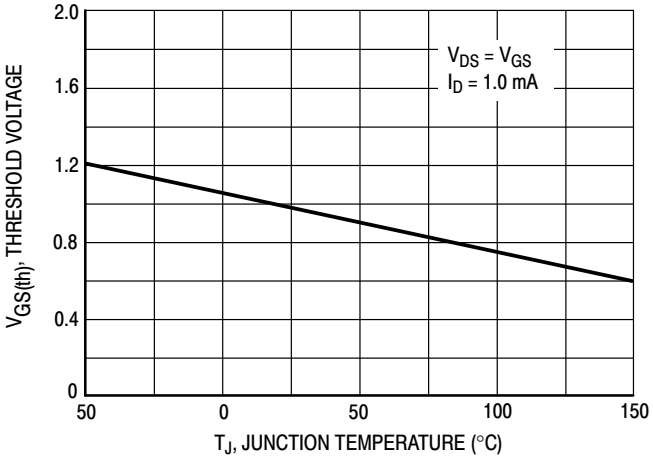


Figure 3. $V_{GS(th)}$ Normalized versus Temperature

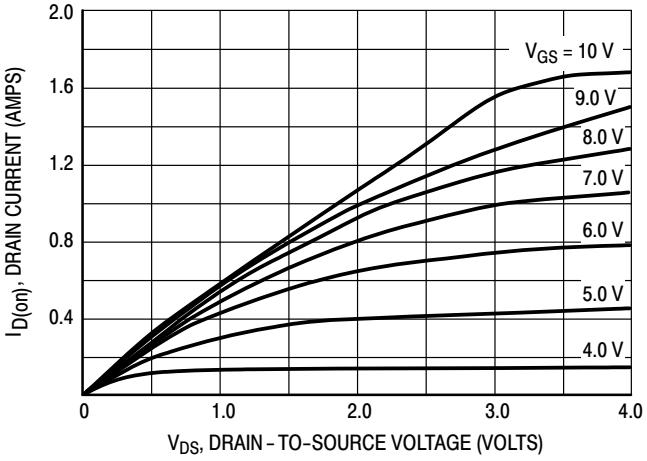


Figure 4. On−Region Characteristics

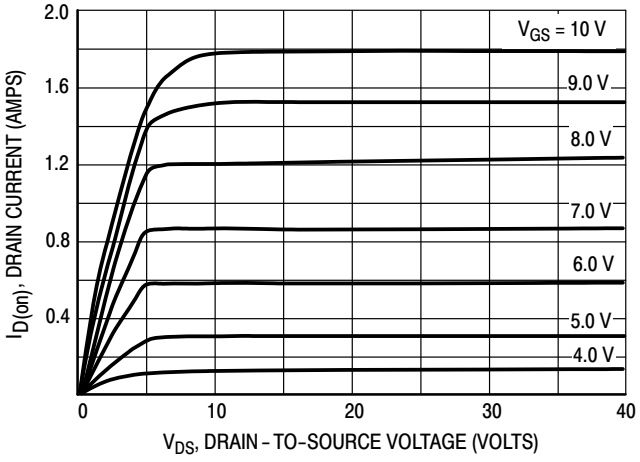


Figure 5. Output Characteristics

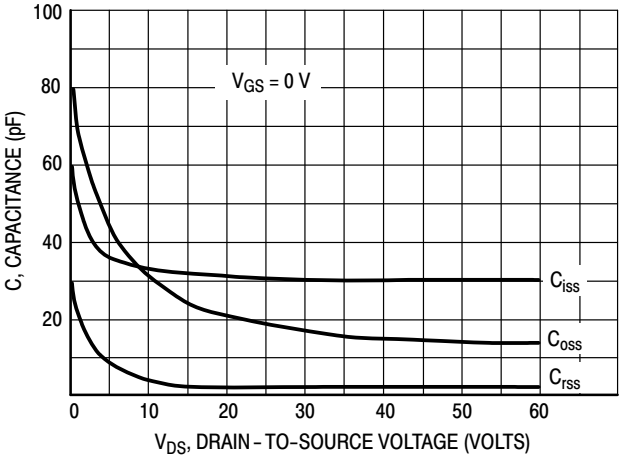


Figure 6. Capacitance versus Drain−To−Source Voltage

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales